



PSW-Series

Multi-Range D.C. Power Supply

FEATURES

- Voltage Rating : 30V/40V/80V/160V/250V/800V,
Output Power Rating : 360W~1080W
- Multi-range Voltage & Current Combinations in One Power Supply
- C.V/C.C Priority ; Particularly Suitable for the Battery and LED Industry
- Adjustable Slew Rate
- Series Operation (2 units in Series) for (30V/40V/80V/160V), Parallel
Operation (3 units in Parallel) for (30V/40V/80V/160V/250V/800V)
- High Efficiency and High Power Density
- 1/2, 1/3, 1/6 Rack Mount Size Design (EIA/JIS Standard) for
360W, 720W, 1080W
- Standard Interface : LAN, USB, Analog Control Interface
- Optional Interface : GPIB-USB Adaptor, RS232-USB Cable
- LabVIEW Driver

GW INSTEK
Simply Reliable

Powerful Stretch with Multi-range Technology

The PSW-Series is a single-output multi-range programmable switching DC Power Supply covering a power range up to 1080W. This series of products include fifteen models with the combination of 30V, 40V, 80V, 160V, 250V and 800V rated voltages and 360W, 720W and 1080W maximum output powers. The multi-range feature allows the flexible and efficient configuration of voltage and current within the rated power range. As the PSW-Series can be connected in series for maximum 2 units or in parallel for maximum 3 units, the capability of connecting multiple PSW-Series units for higher voltage or higher current output provides a broad coverage of applications. With the flexibility of multi-range power utilization and series/parallel connection, the PSW-Series significantly reduces the users' cost for various power supply products to accommodate the projects with different power requirements.

The C.V/C.C priority selection of the PSW-Series is a very useful feature for DUT protection. The conventional power supply normally operates under C.V mode when the power output is turned on. This could bring a high inrush current to the capacitive load or current-intensive load at the power output-on stage. Taking the I-V curve verification of LED as an example, it becomes a very challenging task to perform this measurement using a conventional power supply. With LED connected to a power supply under C.V mode as the initial setting, when the power output is turned on and the voltage rises to the LED forward voltage, the current will suddenly peak up and exceed the preset value of current limit. Upon detecting this high current, the power supply starts the transition from C.V mode to C.C mode. Though the current becomes stable after the C.C mode being activated, the current spike occurred at the C.V and C.C crossover point may possibly damage the DUT. At the power output-on stage, the PSW-Series is able to operate under C.C priority to limit the current spike occurred at the threshold voltage and therefore protects DUT from the inrush current damage.

The adjustable slew rate of the PSW-Series allows users to set for either output voltage or output current, a specific rise time from low to high level transition, and a specific fall time from high to low level transition. This facilitates the characteristic verification of a DUT during voltage or current level changes with controllable slew rates. Most manufacturing tests of lighting device or large capacitor during power output-on are associated with the occurrence of high surge current, which can greatly reduce the life time of the DUT. To prevent inrush current from damaging current-intensive devices, a smooth and slow voltage transition during power On-Off can significantly reduce the spike current and protect the device from high current damage.

The OVP and OCP are provided with the PSW-Series. Both OVP and OCP levels can be selected, with default level set at 110%, of the rated voltage/current of the power supply. When any of the protection levels is tripped, the power output will be switched off to protect the DUT. The PSW-Series provides USB Host/Device and LAN interfaces as standard, GPIB-USB adapter and RS232-USB cable as optional. The LabView driver and the Data Logging PC software are supported on all the available interfaces. An analog control/monitoring connector is also available on the rear panel for external control of power On/Off and external monitoring of power output Voltage and Current.

PANEL INTRODUCTION



1. Voltage Knob
2. Current Knob
3. Output Key
4. Function Keys
5. USB A Port
6. Display
7. Cover Panel
8. Power Switch
9. Analog Control Connector
10. USB B Port
11. Output Terminal (+)
12. Sense Terminal(+/-)
13. Output Terminal (-)
14. Fan
15. AC Input
16. LAN Port

PSW-Series (HV) Rear Panel



PSW-Series (LV) Rear Panel



PSW 80-40.5 (0~80V, 0~40.5A, 1080W)

PARALLEL OPERATION (3 UNITS)

| MODEL | SINGLE UNIT | 2 UNITS | 3 UNITS |
|--------------|-------------|------------|-------------|
| PSW 30-36 | 30V/36A | 30V/72A | 30V/108A |
| PSW 30-72 | 30V/72A | 30V/144A | 30V/216A |
| PSW 30-108 | 30V/108A | 30V/216A | 30V/324A |
| PSW 40-27 | 40V/27A | 40V/54A | 40V/81A |
| PSW 40-54 | 40V/54A | 40V/108A | 40V/162A |
| PSW 40-81 | 40V/81A | 40V/162A | 40V/243A |
| PSW 80-13.5 | 80V/13.5A | 80V/27A | 80V/40.5A |
| PSW 80-27 | 80V/27A | 80V/54A | 80V/81A |
| PSW 80-40.5 | 80V/40.5A | 80V/81A | 80V/121.5A |
| PSW 160-7.2 | 160V/7.2A | 160V/14.4A | 160V/21.6A |
| PSW 160-14.4 | 160V/14.4A | 160V/28.8A | 160V/43.2A |
| PSW 160-21.6 | 160V/21.6A | 160V/43.2A | 160V/64.8A |
| PSW 250-4.5 | 250V/4.5A | 250V/9A | 250V/13.5A |
| PSW 250-9 | 250V/9A | 250V/18A | 250V/27A |
| PSW 250-13.5 | 250V/13.5A | 250V/27A | 250V/40.5A |
| PSW 800-1.44 | 800V/1.44A | 800V/2.88A | 800V/4.32A |
| PSW 800-2.88 | 800V/2.88A | 800V/5.76A | 800V/8.64A |
| PSW 800-4.32 | 800V/4.32A | 800V/8.64A | 800V/12.96A |

SERIES OPERATION (2 UNITS)

| MODEL | SINGLE UNIT | 2 UNITS |
|--------------|-------------|------------|
| PSW 30-36 | 30V/36A | 60V/36A |
| PSW 30-72 | 30V/72A | 60V/72A |
| PSW 30-108 | 30V/108A | 60V/108A |
| PSW 40-27 | 40V/27A | 80V/27A |
| PSW 40-54 | 40V/54A | 80V/54A |
| PSW 40-81 | 40V/81A | 80V/81A |
| PSW 80-13.5 | 80V/13.5A | 160V/13.5A |
| PSW 80-27 | 80V/27A | 160V/27A |
| PSW 80-40.5 | 80V/40.5A | 160V/40.5A |
| PSW 160-7.2 | 160V/7.2A | 320V/7.2A |
| PSW 160-14.4 | 160V/14.4A | 320V/14.4A |
| PSW 160-21.6 | 160V/21.6A | 320V/21.6A |
| PSW 250-4.5 | N/A | N/A |
| PSW 250-9 | N/A | N/A |
| PSW 250-13.5 | N/A | N/A |
| PSW 800-1.44 | N/A | N/A |
| PSW 800-2.88 | N/A | N/A |
| PSW 800-4.32 | N/A | N/A |




PSW 80-27 (0~80V, 0~27A, 720W)




PSW 80-13.5 (0~80V, 0~13.5A, 360W)


A. MULTI-RANGE OPERATION

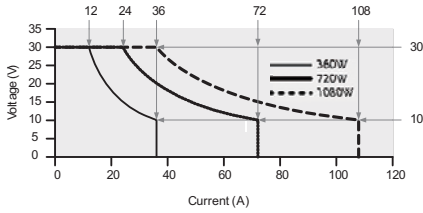


PSW 30V Series Operating Area

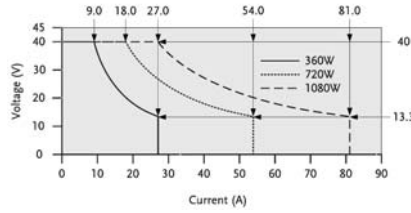


PSW 40V Series Operating Area

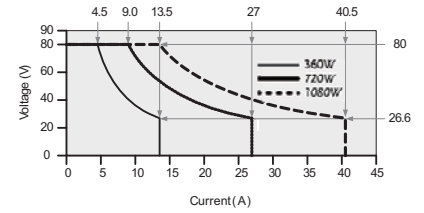


PSW 80V Series Operating Area

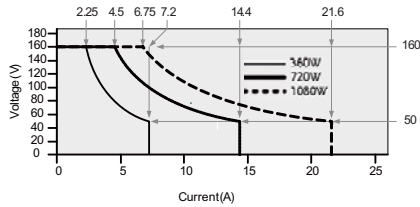

PSW 160V Series Operating Area

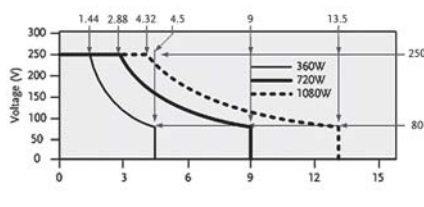

PSW 250V Series Operating Area

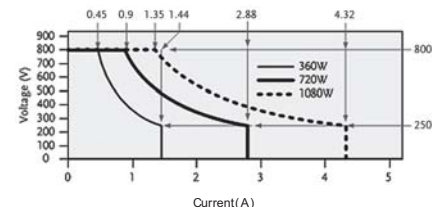


PSW 800V Series Operating Area

When the power supply is configured that the total output (Current x Voltage output) is less than the rated power output, it functions as a typical Constant Current (C.C) and Constant Voltage (C.V) power supply.

However, when the power supply is configured such that the total output power (Current x Voltage Output) exceeds the rated power output, the effective output is actually limited to the operation area of the unit.


B. C.V / C.C PRIORITY SELECTION




The Inrush Current and Surge Voltage occur at LED Forward Voltage (V_f) Under C.V Priority



The CC Priority Feature Effectively Limits the Occurrence of Inrush Current and Surge Voltage when the Supplied Voltage Rises to the LED Forward Voltage



V-I Characteristic of Diode




Operation Under C.V Priority and C.C Priority Respectively

The PSW-Series provides C.C Mode and C.V Mode to fit various applications in the general purpose market. To get into critical application niches, however, the power supply needs to provide

advanced features to meet the specific requirements. The C.C and C.V Priority Selection enable the power supply to run under C.C priority, rather than normal CV priority, at the output-on stage.

C. ADJUSTABLE SLEW RATE




The Adjustable Rise Time of the PSW 30V



The Adjustable Rise Time of the PSW 800V

The PSW-Series has adjustable slew rates for the level transition of both Current and Voltage. This gives the PSW-Series power supply the ability to set specific rise time and fall time of the Voltage and Current drawn from the power supply to verify DUT performance during the Voltage / Current level transition. The feature also provides the benefit to slow down the voltage transition at the power output-on to protect DUT from inrush current damage. This is especially useful for the test of heavy-current-drawn devices like capacitors.


D. BLEEDER CONTROL

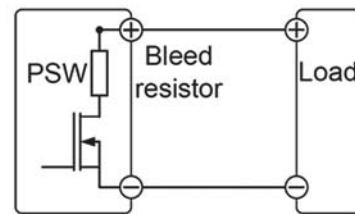

PSW-Series Built-in Bleed Resistor


The PSW-Series employs a bleed resistor in parallel with the output terminal. Bleed resistor is designed to dissipate the power from the power supply filter capacitors when power is turned off and the load is disconnected. Without a bleed resistor, power terminal may remain charged on the filter capacitors for some time and be potentially hazardous. In addition, bleed resistor also allows for smoother voltage regulation of the power supply as the bleed resistor acts as a minimum voltage load. The bleed resistance can be turned on or off using the configuration setting.

E. SERIES AND PARALLEL CONNECTIONS

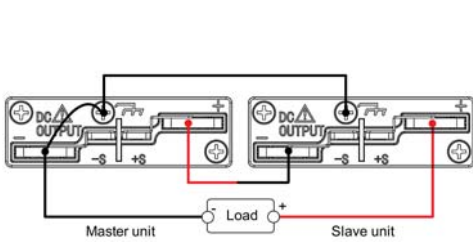


Series Connection

To increase power output capacity, the PSW-Series could be connected in Series mode to perform double voltage rating or in parallel mode to perform triple current rating for each model. With Multi-Range feature

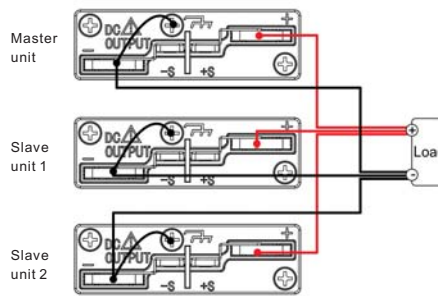

Parallel Connection

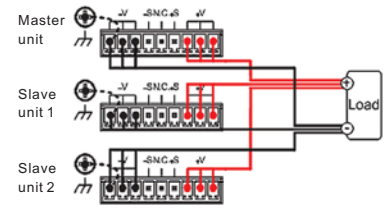


Parallel Connection

PSW 250V/800V only support parallel connections and maximum units in parallel is three.

and Series/Parallel connection capability, the PSW-Series is a high power density and cost-effective equipment for the tests of DC power modules, batteries and components in a broad power range.

F. OUTPUT ON /OFF DELAY

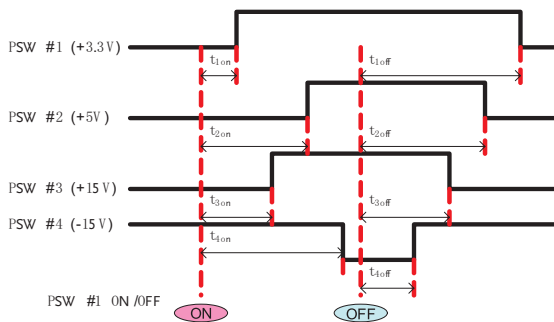

The Example of Output On/Off Delay Control Among Multiple Outputs of the PSW Units

The output On/Off delay feature enables the setting of a specific time delay for output on after the power supply output is turned on, and a specific time delay for output off after the power supply output is turned off. When multiple PSW units are used, the On/Off delay time of each unit can be set respectively referring to fix time points. This multiple-output control can be done through the Analog Control terminal at the rear panel or through the PC programming with standard commands.

G. USING THE RACK MOUNT KIT




Rack Mount Kit GRA-410-J (JIS)



Rack Mount Kit GRA-410-E (EIA)

The Rack Mount Kit of the PSW-Series supports both EIA and JIS standards. A standard rack can accommodate 6 units of type I (360W Output Power) models, or 3 units of type II (720W Output Power) models, or 2 units of type III (1080W Output Power) models. The Rack Mount Kits for EIA standard (P/N: GRA-410-E) and for JIS standard (P/N: GRA-410-J) are provided as optional accessories for the PSW-Series.

H. VARIOUS INTERFACES SUPPORT & EXTENDED TERMINAL BOX

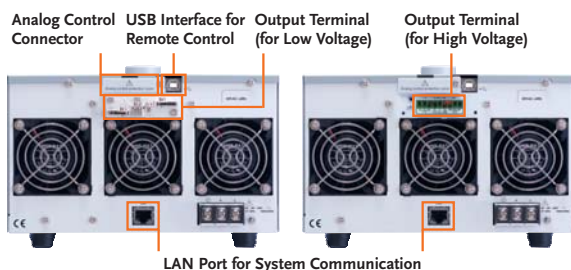

Rear Panel for PSW-Series

The PSW-Series provides USB Host port in the front panel for easy access of stored data, such as test script program. In the rear panel, a USB Device port is available for remote control or I & V data logging of power output through a PC controller. The LAN interface, which meets DHCP standard, is provided as a standard feature of the PSW-Series for system communications and ATE applications.



GUG-001
GPIB to USB
Adapter


GET-001
Extended Terminal
(for PSW 30V/40V/80V/160V)

GET-002
Extended Terminal
(for PSW 250V/800V)


GET-005
Extended European Terminal
(for PSW 30V/40V/80V/160V)

An Extender Terminal box (P/N: GET-001/GET-002/GET-005) is provided as optional accessory to extend the power output form the rear panel to the front side. This extender terminal gives R&D or QC engineers convenience to do the jobs without frequently reaching the output terminal at the rear side of the PSW-Series.


I. EXTERNAL ANALOG REMOTE CONTROL




External Voltage Control of the Voltage Output




External Switch Control of the Main Power Shut-down




External Resistance control of the Voltage Output



External DMM Monitoring of the Output Voltage



External Switch Control of the Output On/Off



External DMM Monitoring of the Output Current

On the rear panel of the PSW-Series power supply, a 26-pin Analog Control connector is available to perform lots of remote control and monitoring functions. The output voltage and current can be set using external voltage or resistance.

The power supply output on/off and main power shut-down can also be controlled using external switches. This Analog Control Connector is complied with the Mil 26 pin connector (OMRON XG4 IDC plug) standard.

OPTIONAL ASSESSORIES

PSW-001



PSW-002



PSW-003



PSW-004



PSW-005




PSW-006



PSW-007



PSW-008



PSW-009




PSW-010



PSW-011



PSW-012



GTL-130




GUR-001A



GUG-001




GET-001



GET-002



GET-005



| SPECIFICATIONS | | | | | | | | | |
|--|---|--|--|---|--|--|---|--|--|
| | PSW 30-36 | PSW 30-72 | PSW 30-108 | PSW 40-27 | PSW 40-54 | PSW 40-81 | PSW 80-13.5 | PSW 80-27 | PSW 80-40.5 |
| OUTPUT RATING | | | | | | | | | |
| Voltage | 0 ~ 30V | 0 ~ 30V | 0 ~ 30V | 0 ~ 40V | 0 ~ 40V | 0 ~ 40V | 0 ~ 80V | 0 ~ 80V | 0 ~ 80V |
| Current | 0 ~ 36A | 0 ~ 72A | 0 ~ 108A | 0 ~ 27A | 0 ~ 54A | 0 ~ 81A | 0 ~ 13.5A | 0 ~ 27A | 0 ~ 40.5A |
| Power | 360W | 720W | 1080W | 360W | 720W | 1080W | 360W | 720W | 1080W |
| REGULATION(CV) | | | | | | | | | |
| Load Line | 20mV 18mV | 20mV 18mV | 20mV 18mV | 25mV 23mV | 25mV 23mV | 25mV 23mV | 45mV 43mV | 45mV 43mV | 45mV 43mV |
| REGULATION(CC) | | | | | | | | | |
| Load Line | 41mA 41mA | 77mA 77mA | 113mA 113mA | 32mA 32mA | 59mA 59mA | 86mA 86mA | 18.5mA 18.5mA | 32mA 32mA | 45.5mA 45.5mA |
| RIPPLE & NOISE (Noise Bandwidth 20MHz; Ripple Bandwidth=1MHz) | | | | | | | | | |
| CV p-p | 60mV | 80mV | 100mV | 60mV | 80mV | 100mV | 60mV | 80mV | 100mV |
| CV rms | 7mV | 11mV | 14mV | 7mV | 11mV | 14mV | 7mV | 11mV | 14mV |
| CC rms | 72mA | 144mA | 216mA | 54mA | 108mA | 162mA | 27mA | 54mA | 81mA |
| PROGRAMMING ACCURACY | | | | | | | | | |
| Voltage | 0.1% +10mV | 0.1% +10mV | 0.1% +10mV | 0.1%+10mV | 0.1%+10mV | 0.1%+10mV | 0.1% +10mV | 0.1% +10mV | 0.1% +10mV |
| Current | 0.1% + 30mA | 0.1% + 60mA | 0.1% + 100mA | 0.1%+20mA | 0.1%+50mA | 0.1%+80mA | 0.1% + 10mA | 0.1% + 30mA | 0.1% + 40mA |
| MEASUREMENT ACCURACY | | | | | | | | | |
| Voltage | 0.1% +10mV | 0.1% +10mV | 0.1% +10mV | 0.1%+10mV | 0.1%+10mV | 0.1%+10mV | 0.1% +10mV | 0.1% +10mV | 0.1% +10mV |
| Current | 0.1% +30mA | 0.1% +60mA | 0.1% +100mA | 0.1%+20mA | 0.1%+50mA | 0.1%+80mA | 0.1% +10mA | 0.1% +30mA | 0.1% +40mA |
| RESPONSE TIME | | | | | | | | | |
| Raise Time | 50ms | 50ms | 50ms | 50ms | 50ms | 50ms | 50ms | 50ms | 50ms |
| Fall Time(Full Load) | 50ms | 50ms | 50ms | 50ms | 50ms | 50ms | 50ms | 50ms | 50ms |
| Fall Time(No Load) | 500ms | 500ms | 500ms | 500ms | 500ms | 500ms | 500ms | 500ms | 500ms |
| Load Transient Recover Time (Load change from 50~100%) | 1ms | 1ms | 1ms | 1ms | 1ms | 1ms | 1ms | 1ms | 1ms |
| PROGRAMMING RESOLUTION (By PC Remote Control Mode) | | | | | | | | | |
| Voltage | 1mV | 1mV | 1mV | 1mV | 1mV | 1mV | 2mV | 2mV | 2mV |
| Current | 1mA | 2mA | 3mA | 1mA | 2mA | 3mA | 1mA | 2mA | 3mA |
| MEASUREMENT RESOLUTION (By PC Remote Control Mode) | | | | | | | | | |
| Voltage | 1mV | 1mV | 1mV | 1mV | 1mV | 1mV | 2mV | 2mV | 2mV |
| Current | 1mA | 2mA | 3mA | 1mA | 2mA | 3mA | 1mA | 2mA | 3mA |
| SERIES AND PARALLEL CAPABILITY | | | | | | | | | |
| Parallel Operation | Up to 3 units including the master unit | | | | | | | | |
| Series Operation | Up to 2 units including the master unit | | | | | | | | |
| PROTECTION FUNCTION | | | | | | | | | |
| OVP | 3~33V | 3~33V | 3~33V | 4 ~ 44V | 4 ~ 44V | 4 ~ 44V | 8~88V | 8~88V | 8~88V |
| OCP | 3.6 ~39.6A | 5~79.2A | 5~118.8A | 2.7 ~ 29.7A | 5 ~ 59.4A | 5 ~ 89.1A | 1.35~14.85A | 2.7~29.7A | 4.05~44.55A |
| OHP | Activated by elevated internal temperatures | | | | | | | | |
| FRONT PANEL DISPLAY ACCURACY, 4 digits | | | | | | | | | |
| Voltage | 0.1%±20mV | 0.1%±20mV | 0.1%±20mV | 0.1%+20mV | 0.1%+20mV | 0.1%+20mV | 0.1%±20mV | 0.1%±20mV | 0.1%±20mV |
| Current | 0.1%±40mA | 0.1%±70mA | 0.1%±100mA | 0.1%+30mA | 0.1%+60mA | 0.1%+80mA | 0.1%±20mA | 0.1%±40mA | 0.1%±50mA |
| ENVIRONMENT CONDITION | | | | | | | | | |
| Operation Temp | 0°C ~ 50°C | | | | | | | | |
| Storage Temp | -25°C ~ 70°C | | | | | | | | |
| Operating Humidity | 20% ~ 85% RH; No condensation | | | | | | | | |
| Storage Humidity | 90% RH or Less; No condensation | | | | | | | | |
| READ BACK TEMP COEFFICIENT | | | | | | | | | |
| Voltage | 100ppm/°C of rated output voltage : after a 30 minute warm-up | | | | | | | | |
| Current | 200ppm/°C of rated output current : after a 30 minute warm-up | | | | | | | | |
| OTHER | | | | | | | | | |
| Analog Control Interface | Yes USB/LAN/GPIB-USB(Optional)/RS232-USB(Optional) | | | | | | | | |
| Fan | With thermal sensing control | | | | | | | | |
| POWER SOURCE | 85VAC~265VAC, 47~63Hz, single phase | | | | | | | | |
| DIMENSIONS & WEIGHT | 71(W)x124(H) x350(D) mm ; Approx. 3kg | 142(W)x124(H) x350(D) mm ; Approx. 5.3kg | 214(W)x124(H) x350(D) mm ; Approx. 7.5kg | 71(W)x124(H) x350(D) mm ; Approx. 3kg | 142(W)x124(H) x350(D) mm ; Approx. 5.3kg | 214(W)x124(H) x350(D) mm ; Approx. 7.5kg | 71(W)x124(H) x350(D) mm ; Approx. 3kg | 142(W)x124(H) x350(D) mm ; Approx. 5.3kg | 214(W)x124(H) x350(D) mm ; Approx. 7.5kg |

| ORDERING INFORMATION | |
|----------------------|--|
| PSW 30-36 | (0~30V/0~36A/360W) Multi-Range DC Power Supply |
| PSW 30-72 | (0~30V/0~72A/720W) Multi-Range DC Power Supply |
| PSW 30-108 | (0~30V/0~108A/1080W) Multi-Range DC Power Supply |
| PSW 40-27 | (0~40V/0~27A/360W) Multi-Range DC Power Supply |
| PSW 40-54 | (0~40V/0~54A/720W) Multi-Range DC Power Supply |
| PSW 40-81 | (0~40V/0~81A/1080W) Multi-Range DC Power Supply |
| PSW 80-13.5 | (0~80V/0~13.5A/360W) Multi-Range DC Power Supply |
| PSW 80-27 | (0~80V/0~27A/720W) Multi-Range DC Power Supply |
| PSW 80-40.5 | (0~80V/0~40.5A/1080W) Multi-Range DC Power Supply |
| PSW 160-7.2 | (0~160V/0~7.2A/360W) Multi-Range DC Power Supply |
| PSW 160-14.4 | (0~160V/0~14.4A/720W) Multi-Range DC Power Supply |
| PSW 160-21.6 | (0~160V/0~21.6A/1080W) Multi-Range DC Power Supply |
| PSW 250-4.5 | (0~250V/0~4.5A/360W) Multi-Range DC Power Supply |
| PSW 250-9 | (0~250V/0~9A/720W) Multi-Range DC Power Supply |
| PSW 250-13.5 | (0~250V/0~13.5A/1080W) Multi-Range DC Power Supply |
| PSW 800-1.44 | (0~800V/0~1.44A/360W) Multi-Range DC Power Supply |
| PSW 800-2.88 | (0~800V/0~2.88A/720W) Multi-Range DC Power Supply |
| PSW 800-4.32 | (0~800V/0~4.32A/1080W) Multi-Range DC Power Supply |

| ACCESSORIES | |
|---|--|
| CD-ROM x 1 (Programming Manual, User Manual), GTL-123 Test Lead x 1 (for PSW 30V/40V/80V/160V), Power Cord x 1 (Region dependent), GTL-240 USB Cable " L " Type x 1, PSW-004 Basic Accessories Kit x 1 (for PSW 30V/40V/80V/160V), Includes : M4 Terminal screws and washers x 2, Air Filter x 1, Analog control protection dummy x 1, Analog control lock lever x 1, M8 terminal bolts, nuts and washers x 2 | |
| PSW-008 Basic Accessories kit for PSW 250V/800V models | PSW-011 Output terminal cover for 250V/800V models |
| PSW-009 Output terminal cover for 30V/40V/80V/160V models | PSW-012 High voltage output terminal for 250V/800V model |
| OPTIONAL ACCESSORIES | |
| PSW-001 Accessory Kit | GRA-410-J Rack Mount Kit (JIS) |
| PSW-002 Simple IDC Tool | GRA-410-E Rack Mount Kit (EIA) |
| PSW-003 Contact Removal Tool | PSW-010 Large filter (Type II/III) |
| PSW-005 Cable for 2 Units of PSW-Series in Series Mode Connection (for PSW 30V/40V/80V/160V) | CUG-001 GPIB to USB Adaptor |
| PSW-006 Cable for 2 Units of PSW-Series in Parallel Mode Connection | CUR-001A USB to RS-232 Cable, 300mm |
| PSW-007 Cable for 3 Units of PSW-Series in Parallel Mode Connection | |
| GET-001 Extended Terminal with max. 30A (for PSW 30V/40V/80V/160V) | |
| GET-002 Extended Terminal with max. 10A (for PSW 250V/800V) | |
| GET-005 Extended European Terminal with max. 20A (for PSW 30V/40V/80V/160V) | |
| GTL-130 Test lead : 2 x red, 2 x black (for PSW 250V/800V) | |
| GTL-248 GPIB Cable, Double Shielded, 2000mm | |
| GTL-250 GPIB Cable, Double Shielded, 600mm | |

| SPECIFICATIONS | | | | | | | | | |
|--|---|--|--|---|---|--|---|--|--|
| | PSW 160-7.2 | PSW 160-14.4 | PSW 160-21.6 | PSW 250-4.5 | PSW 250-9 | PSW 250-13.5 | PSW 800-1.44 | PSW 800-2.88 | PSW 800-4.32 |
| OUTPUT RATING | | | | | | | | | |
| Voltage | 0 ~ 160V | 0 ~ 160V | 0 ~ 160V | 0 ~ 250V | 0 ~ 250V | 0 ~ 250V | 0 ~ 800V | 0 ~ 800V | 0 ~ 800V |
| Current | 0 ~ 7.2A | 0 ~ 14.4A | 0 ~ 21.6A | 0 ~ 4.5A | 0 ~ 9A | 0 ~ 13.5A | 0 ~ 1.44A | 0 ~ 2.88A | 0 ~ 4.32A |
| Power | 360W | 720W | 1080W | 360W | 720W | 1080W | 360W | 720W | 1080W |
| REGULATION(CV) | | | | | | | | | |
| Load Line | 85mV 83mV | 85mV 83mV | 85mV 83mV | 130mV 128mV | 130mV 128mV | 130mV 128mV | 405mV 403mV | 405mV 403mV | 405mV 403mV |
| REGULATION(CC) | | | | | | | | | |
| Load Line | 12.2mA 12.2mA | 19.4mA 19.4mA | 26.6mA 26.6mA | 9.5mA 9.5mA | 14mA 14mA | 18.5mA 18.5mA | 6.44mA 6.44mA | 7.88mA 7.88mA | 9.32mA 9.32mA |
| RIPPLE & NOISE (Noise Bandwidth 20MHz; Ripple Bandwidth=1MHz) | | | | | | | | | |
| CV p-p | 60mV | 80mV | 100mV | 80mV | 100mV | 120mV | 150mV | 200mV | 200mV |
| CV rms | 12mV | 15mV | 20mV | 15mV | 15mV | 15mV | 30mV | 30mV | 30mV |
| CC rms | 15mA | 30mA | 45mA | 10mA | 20mA | 30mA | 5mA | 10mA | 15mA |
| PROGRAMMING ACCURACY | | | | | | | | | |
| Voltage | 0.1% +100mV | 0.1% +100mV | 0.1% +100mV | 0.1%+200mV | 0.1%+200mV | 0.1%+200mV | 0.1%+400mV | 0.1%+400mV | 0.1%+400mV |
| Current | 0.1% +5mA | 0.1% +15mA | 0.1% +20mA | 0.1%+5mA | 0.1%+10mA | 0.1%+15mA | 0.1%+2mA | 0.1%+4mA | 0.1%+6mA |
| MEASUREMENT ACCURACY | | | | | | | | | |
| Voltage | 0.1% +100mV | 0.1% +100mV | 0.1% +100mV | 0.1%+200mV | 0.1%+200mV | 0.1%+200mV | 0.1%+400mV | 0.1%+400mV | 0.1%+400mV |
| Current | 0.1% +5mA | 0.1% +15mA | 0.1% +20mA | 0.1%+5mA | 0.1%+10mA | 0.1%+15mA | 0.1%+2mA | 0.1%+4mA | 0.1%+6mA |
| RESPONSE TIME | | | | | | | | | |
| Raise Time | 100ms | 100ms | 100ms | 100ms | 100ms | 100ms | 150ms | 150ms | 150ms |
| Fall Time(Full Load) | 100ms | 100ms | 100ms | 150ms | 150ms | 150ms | 300ms | 300ms | 300ms |
| Fall Time(No Load) | 1000ms | 1000ms | 1000ms | 1200ms | 1200ms | 1200ms | 2000ms | 2000ms | 2000ms |
| Load Transient Recover Time (Load change from 50~100%) | 2ms | 2ms | 2ms | 2ms | 2ms | 2ms | 2ms | 2ms | 2ms |
| PROGRAMMING RESOLUTION (By PC Remote Control Mode) | | | | | | | | | |
| Voltage | 3mV | 3mV | 3mV | 5mV | 5mV | 5mV | 14mV | 14mV | 14mV |
| Current | 1mA | 2mA | 3mA | 1mA | 1mA | 1mA | 1mA | 1mA | 1mA |
| MEASUREMENT RESOLUTION (By PC Remote Control Mode) | | | | | | | | | |
| Voltage | 3mV | 3mV | 3mV | 5mV | 5mV | 5mV | 14mV | 14mV | 14mV |
| Current | 1mA | 2mA | 3mA | 1mA | 1mA | 1mA | 1mA | 1mA | 1mA |
| SERIES AND PARALLEL CAPABILITY | | | | | | | | | |
| Parallel Operation | Up to 3 units including the master unit | | | 3 | 3 | 3 | 3 | 3 | 3 |
| Series Operation | Up to 2 units including the master unit | | | N/A | N/A | N/A | N/A | N/A | N/A |
| PROTECTION FUNCTION | | | | | | | | | |
| OVP | 16~176V | 16~176V | 16~176V | 20~275V | 20~275V | 20~275V | 20~880V | 20~880V | 20~880V |
| OCP | 0.72~7.92A | 1.44~15.84A | 2.16~23.76A | 0.45~4.95A | 0.9~9.9A | 1.35~14.85A | 0.144~1.584A | 0.288~3.168A | 0.432~4.752A |
| OHP | Activated by elevated internal temperatures | | | | | | | | |
| FRONT PANEL DISPLAY ACCURACY, 4 digits | | | | | | | | | |
| Voltage | 0.1%±100mV | 0.1%±100mV | 0.1%±100mV | 0.1%±200mV | 0.1%±200mV | 0.1%±200mV | 0.1%±400mV | 0.1%±400mV | 0.1%±400mV |
| Current | 0.1%±5mA | 0.1%±30mA | 0.1%±30mA | 0.1%±5mA | 0.1%±10mA | 0.1%±20mA | 0.1%±2mA | 0.1%±4mA | 0.1%±6mA |
| ENVIRONMENT CONDITION | | | | | | | | | |
| Operation Temp | 0°C ~ 50°C | | | | | | | | |
| Storage Temp | -25°C ~ 70°C | | | | | | | | |
| Operating Humidity | 20% ~ 85% RH; No condensation | | | | | | | | |
| Storage Humidity | 90% RH or Less; No condensation | | | | | | | | |
| READ BACK TEMP COEFFICIENT | | | | | | | | | |
| Voltage | 100ppm/°C of rated output voltage : after a 30 minute warm-up | | | | | | | | |
| Current | 200ppm/°C of rated output current : after a 30 minute warm-up | | | | | | | | |
| OTHER | | | | | | | | | |
| Analog Control | Yes | | | | | | | | |
| Interface | USB/LAN/GPIB-USB(Optional)/RS232-USB(Optional) | | | | | | | | |
| Fan | With thermal sensing control | | | | | | | | |
| POWER SOURCE | 85VAC~265VAC, 47~63Hz, single phase | | | | | | | | |
| DIMENSIONS & WEIGHT | 71(W)x124(H) x350(D) mm ; Approx. 3kg | 142(W)x124(H) x350(D) mm ; Approx. 5.3kg | 214(W)x124(H) x350(D) mm ; Approx. 7.5kg | 71(W)x124(H) x350(D) mm ; Approx. 3kg | 142(W)x124(H) x350(D)mm ; Approx. 5.3kg | 214(W)x124(H) x350(D) mm ; Approx. 7.5kg | 71(W)x124(H) x350(D) mm ; Approx. 3kg | 142(W)x124(H) x350(D) mm ; Approx. 5.3kg | 214(W)x124(H) x350(D) mm ; Approx. 7.5kg |

Specifications subject to change without notice. SW-0000GD5BH

