

多通道訊號記錄器



4 通道輸入，且可並聯設備

MCR-4V





即時顯示數值與變化的曲線圖

MCR-4V



MCR-4TC



	MCR-4V	MCR-4TC
輸入訊號	電壓 x 4	熱電偶 Type K, J, T, S, R
量測範圍	$\pm 300 \text{ mV} \pm (0.06 \text{ mV} + 0.3\%)$ $\pm 1.5 \text{ V} \pm (0.3 \text{ mV} + 0.3\%)$ $\pm 6 \text{ V} \pm (0.6 \text{ mV} + 0.3\%)$ $\pm 24 \text{ V} \pm (2.4 \text{ mV} + 0.3\%)$	K: $-270 \sim 1,370 \text{ }^{\circ}\text{C} \pm (0.3\% + 0.5^{\circ}\text{C})$ J: $-210 \sim 1,200 \text{ }^{\circ}\text{C} \pm (0.3\% + 0.5^{\circ}\text{C})$ T: $-270 \sim 400 \text{ }^{\circ}\text{C} \pm (0.3\% + 0.5^{\circ}\text{C})$ S: $-50 \sim 1,760 \text{ }^{\circ}\text{C} \pm (0.3\% + 1.5^{\circ}\text{C})$ R: $-50 \sim 1,760 \text{ }^{\circ}\text{C} \pm (0.3\% + 1.5^{\circ}\text{C})$
解析度	50~60 Hz 開啟過濾 :0.01 mV ; 關 :0.1 mV	0.1 °C
記錄間隔	2, 5, 10, 20, 50, 100, 200, 500 ms. 1, 2, 5, 10, 15, 20, 30 秒. 1, 2, 5, 10, 15, 20, 30, 60 分.	100, 200, 500 ms. 1, 2, 5, 10, 15, 20, 30 秒. 1, 2, 5, 10, 15, 20, 30, 60 分.
記錄筆數	總共 480,000 筆	總共 960,000 筆
記錄模式	循環記錄 (Endless)/ 單次記錄 (One Time)	
傳輸規格	USB 傳輸 / SD 卡轉存	
電源規格	1.5V 四號電池 (AAA) x 2/ USB 供電	
電池壽命	最久可達 130 天	最久可達 60 天
工作環境	0~50 °C 濕度低於 90%RH 不可結露	
外觀	120 x 75 x 32 mm, 約 140g	

多通道溫度記錄器

4 通道輸入，且可並聯設備


MCR-4TC



氣象觀測感應器



太陽能發電電力

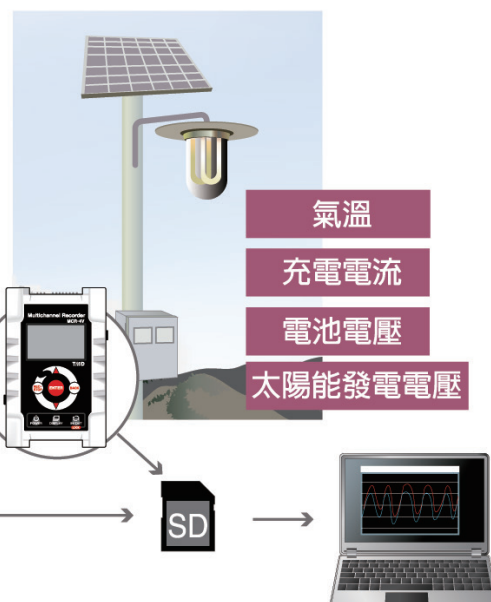

並聯 16 通道記錄

可並聯 4 台記錄器，同步記錄 16 個溫度。

