


TR-50U2 Communication Port



TR-50U2 is a Communication Port to download data measured and recorded by Thermo Recorder TR-51i / 51S and/or TR-52i / 52S to your computer.

The collected data can be downloaded to your computer via the included software "T&D Recorder for Windows (TR-5,7xU)" where you can use the software to create colorful graphs , tables, export text files, as well as manage files and control printing.

	TR-50U2
Compatible Models	TR-51i / 52i / 55i, TR-51S / 52S, TR-51A / TR-52
PC Interface	USB Communication: USB 2.0 (with PC)
Communication Speed	TR-51i / 52i, TR-51S / 52S: MAX speed 19200bps / Download Time at Full Data: about 25 sec. TR-51A / 52 : MAX speed 2400bps / Download Time at Full Data: about 160 sec.
Dimensions	H: 80mm x W: 56mm x D: 16.5mm (excluding protrusions)
Weight	Approx. 30g
Operating Environment	Temperature: -10 to 60°C Humidity: less than 90%RH (No condensation) Do not use if the Data Logger is wet.
* Communication is not possible with RTR-5 Series units.	

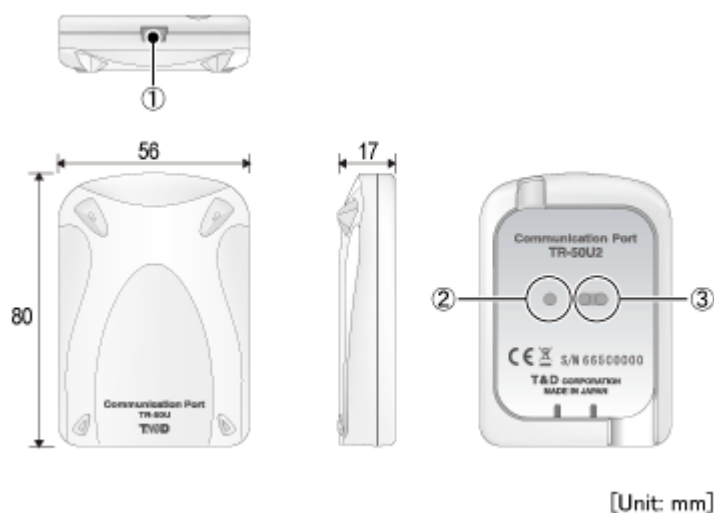

- 1:USB Cable Jack
- 2:Remote Detection Sensor
- 3:Optical Communication Spots