


Digital Display Signage

TRH-3306DX5

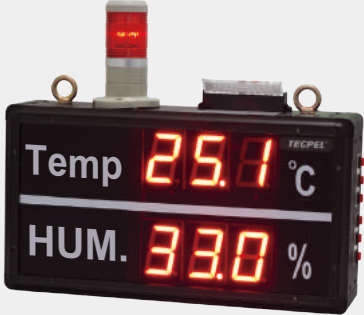

TRH-3306DHL

Warning light



TRH-3306DTY



Transmitter
TRH-203



Transmitter
TRH-303



IRS-22

Infrared Thermometer




Display Indicator

	TRH-33xx
Level	6Cm / 10Cm
Colour	red
Alarm	Continued (select)
Beep	Continued (select)
IN	4~20mA / 0~5V / K · T / PT100
OUT	DC24V / RS485 · RJ45 (select)
POWER	110 / 220 V (60Hz)
Expansion	Recording/ Network (Remote)

CO2 / Temperature


TRH-3310C-PT2

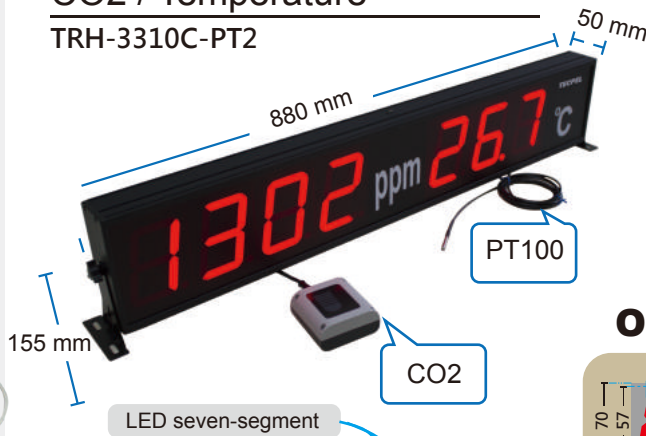

Warning

waterproof

Option:

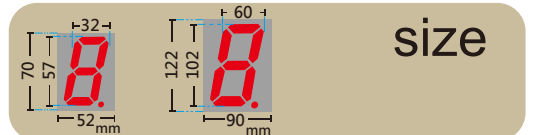

size



Digits

Common range

O2 : 0 ~ 20

CO2 : 400 ~ 5000

Temp : 0.0 ~ 99.9

hum. : 0.0 ~ 99.9

Noise : 10.0 ~ 145.0

	TRH-203	TRH-303	IRS-10	IRS-20	IRS-22
Temp	0 ~ 100 / -20 ~ 80 °C	0 ~ 100 / -20 ~ 80 °C	0 ~ 500 °C	0 ~ 500 °C	-40 ~ 900 °C
HUM.	0 ~ 100 %RH	0 ~ 100 %RH	----	----	----
IN	DC 9 ~ 24 V	DC 9 ~ 24 V	DC 24 V	DC 24 V	DC 8 ~ 36 V
OUT	4 ~ 20mA	4 ~ 20mA 0 ~ 1 / 0 ~ 5V(Optional)	0 ~ 5V	4 ~ 20mA	4 ~ 20mA K / J Type USB(RS232)
Size	190 X 21 mm	190 X 90 mm	20 X 120 mm	35 X 38.5 mm	120 X 70 X 30 mm
Weight	90 g	150 g	120 g	200 g	200 g